

# **TABLE OF CONTENTS**

### **HIGH EAVE (PARAPET)**

EI7350 - HE PARAPET WITH RAKE TERM AT CORNER - OUTSIDE - VR

EI7351 - HE PARAPET TO RAKE PARAPET - OUTSIDE - VERTICAL RIB

EI7380 - HE PARAPET WITH RAKE TERM - INSIDE - VR


EI7381 - HE PARAPET TO RAKE PARAPET - INSIDE - VERTICAL RIB

EI7650 - HE PARAPET WITH RAKE TERM AT CORNER - OUTSIDE - TRAP

EI7651 - HE PARAPET TO RAKE PARAPET - OUTSIDE - TRAP

EI7680 - HE PARAPET WITH RAKE TERM - INSIDE - TRAP

EI7681 - HE PARAPET TO RAKE PARAPET - INSIDE - TRAP







#### EI7350 HIGH EAVE PARAPET WITH RAKE TERMINATION AT CORNER - OUTSIDE - VERTICAL RIB

Download the DWG file by clicking here.

#### HIGH EAVE PARAPET WITH RAKE TERMINATION AT CORNER

#### RAKE TERMINATION AT WALL


EXTEND THE RAKE TRIM TO STEEL LINE WHERE THE PROFILE WILL LAP APPROXIMATELY 1\* ON THE WALL CORNER TRIM THAT WILL BE INSTALLED LATER. ATTACH THE RAKE TRIM END CAP (H4000\_) INTO THE HIGH SIDE OF THE RAKE TRIM. FASTEN WITH POP RIVETS (H1100). DO NOT ATTACH RAKE TRIM TO WALL UNTIL AFTER CORNER TRIM IS INSTALL. RAKE TRIM WILL NEED TO BE ROLLED OUT TO SLIDE CORNER TRIM BEHIND FACE OF RAKE TRIM.

# HIGH EAVE PARAPET TRIM INSTALLATION STEP 2

REFERENCE HIGH EAVE PARAPET DETAIL FOR TYPICAL PARAPET INSTALLATION. THE HIGH EAVE PARAPET TRIM SHOULD EXTEND ALL THE WAY OVER TO THE EDGE OF THE TOP HORIZONTAL LEG OF THE RAKE TRIM AS SHOWN. BEND AND TAB AS SHOWN BELOW. USE POLYURETHANE TUBE CAULK (H3152) AND FASTEN THE PARAPET TRIM TO RAKE TRIM WITH (H1050) FASTENERS.

# WALL PANEL & CORNER TRIM INSTALLATION STEP 3

INSTALL WALL PANEL AND CORNER TRIM ACCORDING THOSE DETAILS. CORNER TRIM SHOULD EXTEND DOWN TO THE BOTTOM HORIZONTAL LEG OF THE RAKE TRIM BUT WILL NEED TO BE COPED AT THE UPPER PORTION OF THE RAKE TRIM. THE UPPER PORTION OF THE RAKE TRIM WILL NEED TO EXTEND INSIDE OF THE CORNER TRIM AS SHOWN, SEAL VOIDS WITH POLYURETHANE TUBE CAULK (H3152)

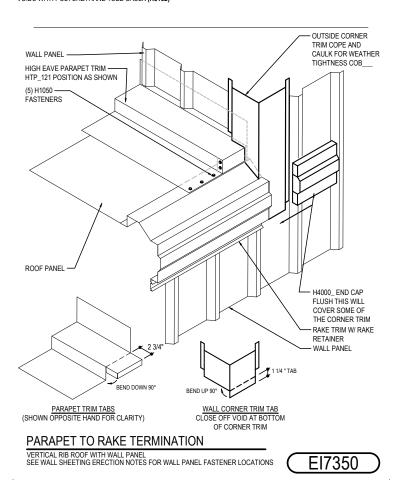

**Detailer Notes:** 

N/A 1)

: 08.06.24 (2024-001) **CERTIFIED ERECTION DETAILS** Detail Size (W x H): 1 x 2 Issued





**ROOF LINE TERMINATION** 

#### EI7351 HIGH EAVE PARAPET TO RAKE PARAPET - OUTSIDE - VERTICAL RIB


#### Download the DWG file by clicking here.

### PREPARATION FOR HIGH EAVE PARAPET LOWER BUILDING EXTENDS

## MODIFIED ZEE CLOSURE AT PARAPET CORNER

FIELD CUT A SLIT AT THE LOCATION OF THE VERTICAL AND HORIZONTAL LEG OF THE RIGID ZEE CLOSURE (RVCZ\_\_).
ADDING 1" TO YOUR MEASUREMENT. PLACE THE HORIZONTAL LEG WITH 2 1/4" TAPE MASTIC (H3020) GOING UNDER PANEL AND OVER TOP OF COPED RAKE ANGLE.


SLIDE VERTICAL LEG OVER THE TOP OF THE PANEL ADD 1°TO YOUR MEASUREMENT AND BEND 50 DEGREES AS SHOWN. AT THE BENT AREA OF THE ZEE CLOSURE, REMOVE THE TOP HORIZONTAL LEG AS SHOWN. THIS WILL ALLOW THE RAKE PARAPET TRIM TO BE CLOSED OFF, AS WILL AS ATTACHED TO THE PANEL AND COPED RAKE FASTEN THE ZEE CLOSURE TO THE OPPED RAKE ANGLE, INCLUDING (1) H1050 FASTENER AT THE HORIZONTAL LEG AND COPED RAKE ANGLE.



## HIGH EAVE PARAPET TRIM INSTALLATION STEP 2

BEFORE INSTALLING THE HIGH EAVE PARAPET TRIM (HTP\_121), PLACE TAPE MASTIC ALONG THE FULL LENGTH OF THE TOP LEG OF THE RIGID CLOSURE.

PLACE THE FLAT LEG OF THE HIGH EAVE PARAPET TRIM "FLUSH" WITH THE END OF THE RIGID CLOSURE ALONG THE FINIWALL AS SHOWN



#### RAKE PARAPET TRIM MOCK UP TO CUT INSTALLATION

STEP 3. BEFORE INSTALLING THE RAKE PARAPET TRIM (RPU12), PLACE TAPE MASTIC ON TOP OF THE ROOF PANEL FROM THE LOW END OF THE RAKE PARAPET TRIM TO THE HIGH END OF THE PANEL (DO NOT REMOVE THE PAPER BACK FROM THE MASTIC WITH LIFE TASIS IN THE RAKE PARAPET TRIM ARE CREATED).


PLACE THE LOW END OF THE RAKE PARAPET TRIM "FLUSH" WITH THE LOW END OF THE HIGH EAVE PARAPET TRIM AS SHOWN.

TRACE THE HIGH EAVE PARAPET TRIM PROFILE ONTO THE BACK VERTICAL LEG OF THE RAKE PARAPET TRIM. CUT THE RAKE PARAPET TRIM TO CREATE TABS AS SHOWN.

APPLY TUBE CAULK TO ALL VOIDS. FASTEN THE TABS TO THE HIGH EAVE PARAPET TRIM WITH H1050 FASTENERS STEP 4: CUT THE RAKE PARAPET TRIM TO CREATE TABS AS SHOWN.

APPLY TUBE CAULK TO ALL VOIDS.

FASTEN THE TARS TO THE HIGH EAVE PARAPET TRIM WITH H1050 FASTENERS




INSTALL THE WALL PANELS PER THE INSTRUCTIONS IN THE WALL PANEL DETAILS INCLUDED IN THIS SET OF ERECTION DRIVINGS


COPE THE OUTSIDE CORNER TRIM (COB\_\_) FLUSH WITH THE BOTTOM OF THE WALL PANELS ON BOTH THE SIDEWALL AND THE ENDWALL.

INSTALL THE OUTSIDE CORNER TRIM AS INDICATED IN THE WALL CORNER DETAIL.


NOTE THAT PANELS ARE SHOWN IN THIS DETAIL FOR REFERENCE ONLY. THE ACTUAL WALL PANEL PROFILE FOR THIS PROJECT MAY VARY.



## HIGH EAVE PARAPET LOW BUILDING EXTENDS STEP 6 WALL PANEL - OPTION 1



#### HIGH EAVE PARAPET LOW BUILDING EXTENDS WALL BY OTHERS - OPTION 2



HIGH EAVE PARAPET- LOW EXTENDS

EI7351

#### **Detailer Notes:**

1) N/A

: 08.06.24 (2024-001) **CERTIFIED ERECTION DETAILS** Detail Size (W x H): 3 X 3 Issued





#### EI7380 HIGH EAVE PARAPET WITH RAKE TERMINATION - INSIDE - VERTICAL RIB

Download the DWG file by clicking here.

### HIGH EAVE PARAPET WITH RAKE TERMINATION

# RAKE TERMINATION AT WALL STEP 1


EXTEND THE RAKE TRIM TO STEEL LINE WHERE THE PROFILE WILL BE MITERED FLUSH WITH THE WALL. ATTACH THE RAKE TRIM END CAP (H4000\_) AND RAKE END CAP (RSC\_) INTO THE HIGH SIDE OF THE RAKE TRIM. FASTEN WITH POP RIVETS (H1100).

# HIGH EAVE PARAPET TRIM INSTALLATION STEP 2

REFERENCE HIGH EAVE PARAPET DETAIL FOR TYPICAL PARAPET INSTALLATION. THE HIGH EAVE PARAPET TRIM SHOULD EXTEND ALL THE WAY OVER TO THE EDGE OF THE TOP HORIZONTAL LEG OF THE RAKE TRIM AS SHOWN. BEND AND TAB AS SHOWN BELOW. USE POLYURETHANE TUBE CAULK (H3152) AND FASTEN THE PARAPET TRIM TO RAKE TRIM WITH (H1050) FASTENERS.

# WALL PANEL INSTALLATION STEP 3

INSTALL WALL PANEL ACCORDING THOSE DETAILS. SEAL VOIDS WITH POLYURETHANE TUBE CAULK (H3152)

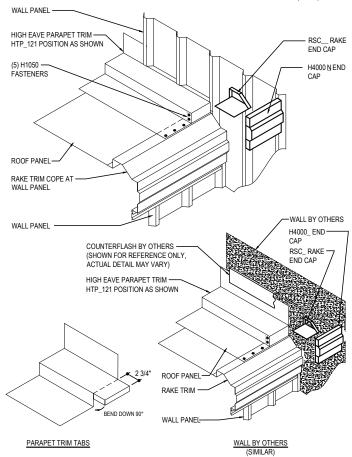

#### PARAPET TO RAKE TERMINATION

VERTICAL RIB ROOF WITH WALL PANEL SEE WALL SHEETING ERECTION NOTES FOR WALL PANEL FASTENER LOCATIONS

E17380

**Detailer Notes:** 

1) N/A

: 08.06.24 (2024-001) **CERTIFIED ERECTION DETAILS** Detail Size (W x H): 1 x 2 Issued





#### EI7381 HIGH EAVE PARAPET TO RAKE PARAPET - INSIDE - VERTICAL RIB

Download the DWG file by clicking here.

### HIGH EAVE PARAPET TO RAKE PARAPET AT CORNER

#### HIGH EAVE PARAPET AT INSIDE CORNER PARAPET INSTALLATION

REFERENCE RAKE AND HIGH EAVE PARAPET DETAILS FOR TYPICAL PARAPET TRIM INSTALLATION.


THE RAKE PARAPET TRIM SHOULD EXTEND TO STEEL LINE. THIS WILL ALLOW THE HIGH EAVE PARAPET TRIM TO FORM A CORNER AS SHOWN BELOW.


NOTE: FIELD MITERING IS REQUIRED BEFORE INSTALLING THE HIGH EAVE PARAPET TRIM. SEE BELOW TO CREATE TABS ON THE HIGH FAVE PARAPET TRIM

APPLY **POLYURETHANE TUBE CAULK (H3152)** TO THE BACK OF AND IN BETWEEN ALL TABS AND PLACE THE HIGH EAVE PARAPET TRIM OVER THE RAKE PARAPET TRIM AS SHOWN. ENSURE TRIMS SEAT WELL TOGETHER IN THE CORNER (NO GAPS) AND ALIGN WITH THE HIGH SIDE WALL. FASTEN THE TRIMS TOGETHER AS SHOWN BELOW IN THE CORDER.

#### THE TRIM MUST BE PROPERLY POSITIONED BEFORE TOUCHING THE MASTIC. MASTIC CANNOT BE REUSED.

ONCE INSTALLED, CAULK SEAMS TO ENSURE THERE ARE NO GAPS OR VOIDS.

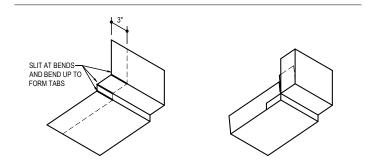

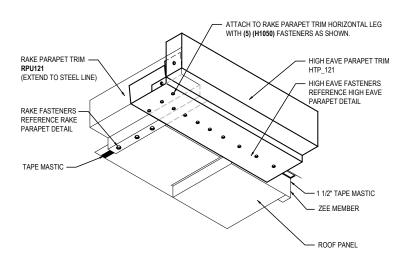

#### HE PARAPET TO RAKE PARAPET INSIDE CORNER

DETAIL SHOWN WITH ROOF AND WALL PANEL. SEE WALL SHEETING ERECTION NOTES FOR WALL PANEL FASTENER LOCATIONS

El7381

**Detailer Notes:** 

1) N/A

Issued: 08.06.24 (2024-001) CERTIFIED ERECTION DETAILS Detail Size (W x H): 1 x 2







#### EI7650 NBS - HIGH EAVE PARAPET WITH RAKE TERMINATION AT CORNER - OUTSIDE - TRAPEZOID

Download the DWG file by clicking here.

#### HIGH EAVE PARAPET WITH RAKE TERMINATION AT CORNER

### RAKE TERMINATION AT WALL


EXTEND THE RAKE TRIM TO STEEL LINE WHERE THE PROFILE WILL LAP APPROXIMATELY 1\* ON THE WALL CORNER TRIM THAT WILL BE INSTALLED LATER. ATTACH THE RAKE TRIM END CAP (H4000\_) INTO THE HIGH SIDE OF THE RAKE TRIM. FASTEN WITH POP RIVETS (H1100). DO NOT ATTACH RAKE TRIM TO WALL UNTIL AFTER CORNER TRIM IS INSTALL. RAKE TRIM WILL NEED TO BE ROLLED OUT TO SLIDE CORNER TRIM BEHIND FACE OF RAKE TRIM.

# HIGH EAVE PARAPET TRIM INSTALLATION STEP 2

REFERENCE HIGH EAVE PARAPET DETAIL FOR TYPICAL PARAPET INSTALLATION. THE HIGH EAVE PARAPET TRIM SHOULD EXTEND ALL THE WAY OVER TO THE EDGE OF THE TOP HORIZONTAL LEG OF THE RAKE TRIM AS SHOWN. BEND AND TAB AS SHOWN BELOW. USE POLYURETHANE TUBE CAULK (H3152) AND FASTEN THE PARAPET TRIM TO RAKE TRIM WITH (H1050) FASTENERS.

# WALL PANEL & CORNER TRIM INSTALLATION STEP 3

INSTALL WALL PANEL AND CORNER TRIM ACCORDING THOSE DETAILS. CORNER TRIM SHOULD EXTEND DOWN TO THE BOTTOM HORIZONTAL LEG OF THE RAKE TRIM BUT WILL NEED TO BE COPED AT THE UPPER PORTION OF THE RAKE TRIM. THE UPPER PORTION OF THE RAKE TRIM WILL NEED TO EXTEND INSIDE OF THE CORNER TRIM AS SHOWN. SEAL VOIDS WITH POLYURETHANE TUBE CAULK (H3152)

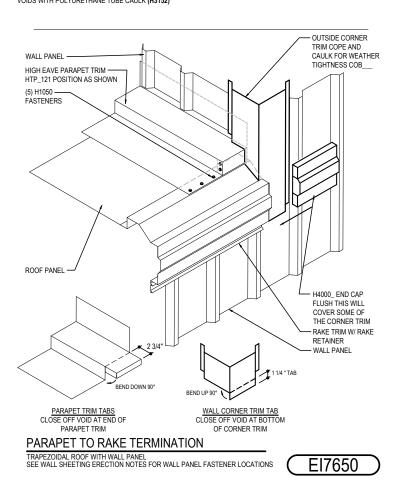

**Detailer Notes:** 

1) N/A

: 10.14.22 (2020-039) **CERTIFIED ERECTION DETAILS** Detail Size (W x H): 1 x 2 Issued


Issued By: SLF



#### **ROOF LINE TERMINATION**

#### EI7651 HIGH EAVE PARAPET TO RAKE PARAPET - OUTSIDE - TRAPEZOID


#### Download the DWG file by clicking here.




### OUTSIDE PANEL CLOSURE INSTALLATION


FIELD CUT AN OUTSIDE PANEL CLOSURE TO THE PROPER LENGTH ADDING 4 3/4" PAST INSIDE FACE OF PARAPET WALL AND ADD 1 1/2" TO FORM A VERTICAL TAB. THE TOP HORIZONTAL LEG WILL BE TRIMMED OFF. (SEE BELOW) THIS WILL CLOSE OFF TO THE INSIDE OF THE RAKE PARAPET TRIM.

APPLY PRECUT OUTSIDE CLOSURE MASTIC TO THE TOP OF PANEL TAKING CARE TO MOLD TO CONTOUR OF PANEL. AND APPLY BUTYL TUBE CAULK (H315) ALONG MASTIC AT PANEL RIB. (FILL ANY GAPS WHERE THE RIB DO DAMS INTERSECT), INSTALL OUTSIDE PANEL CLOSURE TAKING CARE TO MARE SURE MASTIC IS COMPRESSED AND THERE ARE NO GAPS AS DIRECTED IN THE BASIC INSTALLATION DETAIL





BEFORE INSTALLING THE HIGH EAVE PARAPET TRIM (HTP\_121), PLACE TAPE MASTIC AND CAULK ALONG THE FULL LENGTH OF THE TOP LEG OF THE OUTSIDE PANEL CLOSURES AS INDICATED IN THE BASIC INSTALLATION DETAIL AND BELOW.




### RAKE PARAPET TRIM MOCK UP TO CUT INSTALLATION

BEFORE INSTALLING THE RAKE PARAPET TRIM (RPUI21), PLACE TAPE MASTIC ON TOP OF THE ROOF PANEL, FROM THE LOW END OF THE RAKE PARAPET TRIM TO THE HIGH END OF THE PANEL (DD NOT REMOVE THE PAPER BACK FROM THE MASTIC UNTIL THE TABLS IN THE RAKE PARAPET TRIM RATE CREATED).

PLACE THE LOW END OF THE RAKE PARAPET TRIM "FLUSH" WITH THE LOW END OF THE HIGH EAVE PARAPET TRIM AS SHOWN. TRACE THE HIGH EAVE PARAPET TRIM PROFILE ONTO THE BACK VERTICAL LEG OF THE RAKE PARAPET TRIM. CUT THE RAKE PARAPET TRIM TO GENETE TASS AS SHOWN.

APPLY TUBE CAULK TO ALL VOIDS. FASTEN THE TABS TO THE HIGH EAVE PARAPET TRIM WITH H1050 FASTENERS.




## INSTALL WALL PANELS AND COPE CORNER TRIM STEP 5

INSTALL THE WALL PANELS PER THE INSTRUCTIONS IN THE WALL PANEL DETAILS INCLUDED IN THIS SET OF ERECTION


COPE THE OUTSIDE CORNER TRIM (COB\_\_) FLUSH WITH THE BOTTOM OF THE WALL PANELS ON BOTH THE SIDEWALL AND THE FROWALI

NSTALL THE OUTSIDE CORNER TRIM AS INDICATED IN THE WALL CORNER DETAIL.


NOTE THAT PANELS ARE SHOWN IN THIS DETAIL FOR REFERENCE ONLY. THE ACTUAL WALL PANEL PROFILE FOR THIS PROJECT MAY VARY.







## HIGH EAVE PARAPET LOW BUILDING EXTENDS WALL BY OTHERS - OPTION 2



HIGH EAVE PARAPET- LOW EXTENDS

El7651

#### **Detailer Notes:**

1) N/A

: 10.14.22 (2020-039) **CERTIFIED ERECTION DETAILS** Detail Size (W x H): 3 X 3 Issued

Issued By: SLF





Detail Size (W x H): 1 x 2



#### EI7680 HIGH EAVE PARAPET WITH RAKE TERMINATION - INSIDE - TRAP

Download the DWG file by clicking here.

#### HIGH EAVE PARAPET WITH RAKE TERMINATION

# RAKE TERMINATION AT WALL STEP 1


EXTEND THE RAKE TRIM TO STEEL LINE WHERE THE PROFILE WILL BE MITERED FLUSH WITH THE WALL. ATTACH THE RAKE TRIM END CAP ( $H4000_$ ) AND RAKE END CAP ( $RSC_$ ) INTO THE HIGH SIDE OF THE RAKE TRIM. FASTEN WITH POP RIVETS (H1100).

# HIGH EAVE PARAPET TRIM INSTALLATION STEP 2

REFERENCE HIGH EAVE PARAPET DETAIL FOR TYPICAL PARAPET INSTALLATION. THE HIGH EAVE PARAPET TRIM SHOULD EXTEND ALL THE WAY OVER TO THE EDGE OF THE TOP HORIZONTAL LEG OF THE RAKE TRIM AS SHOWN. BEND AND TAB AS SHOWN BELOW. USE POLYURETHANE TUBE CAULK (H3152) AND FASTEN THE PARAPET TRIM TO RAKE TRIM WITH (H1050) FASTENERS.

# WALL PANEL INSTALLATION STEP 3

INSTALL WALL PANEL ACCORDING THOSE DETAILS. SEAL VOIDS WITH POLYURETHANE TUBE CAULK (H3152)

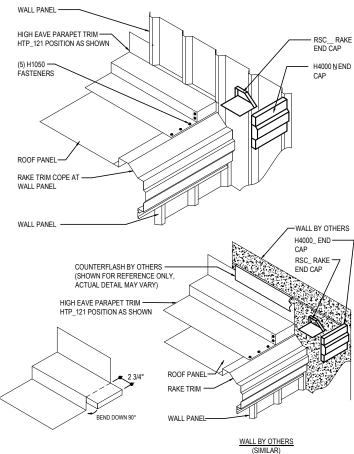

#### PARAPET TO RAKE TERMINATION

TRAPEZOIDAL ROOF WITH WALL PANEL SEE WALL SHEETING ERECTION NOTES FOR WALL PANEL FASTENER LOCATIONS

E17680

**Detailer Notes:** 

1) N/A

: 04.11.24 (MR2024.04)

Issued By: BSS

Issued





#### EI7681 - HIGH EAVE PARAPET TO RAKE PARAPET - INSIDE - TRAPEZOID

Download the DWG file by clicking here.

### HIGH EAVE PARAPET TO RAKE PARAPET AT CORNER

#### HIGH EAVE PARAPET AT INSIDE CORNER PARAPET INSTALLATION

REFERENCE RAKE AND HIGH EAVE PARAPET DETAILS FOR TYPICAL PARAPET TRIM INSTALLATION.


THE RAKE PARAPET TRIM SHOULD EXTEND TO END OF ROOF PANEL. THIS WILL ALLOW THE HIGH EAVE PARAPET TRIM TO FORM A CORNER AS SHOWN BELOW.

NOTE: FIELD MITERING IS REQUIRED BEFORE INSTALLING THE HIGH EAVE PARAPET TRIM. SEE BELOW TO CREATE TABS ON THE HIGH FAVE PARAPET TRIM

APPLY **POLYURETHANE TUBE CAULK (H3152)** TO THE BACK OF AND IN BETWEEN ALL TABS AND PLACE THE HIGH EAVE PARAPET TRIM OVER THE RAKE PARAPET TRIM AS SHOWN. ENSURE TRIMS SEAT WELL TOGETHER IN THE CORNER (NO APS) AND A LIGN WITH THE HIGH SIDE WALL. FASTEN THE TRIMS TOGETHER AS SHOWN BELOW IN THE CORDER.

#### THE TRIM MUST BE PROPERLY POSITIONED BEFORE TOUCHING THE MASTIC. MASTIC CANNOT BE REUSED.

ONCE INSTALLED, CAULK SEAMS TO ENSURE THERE ARE NO GAPS OR VOIDS.

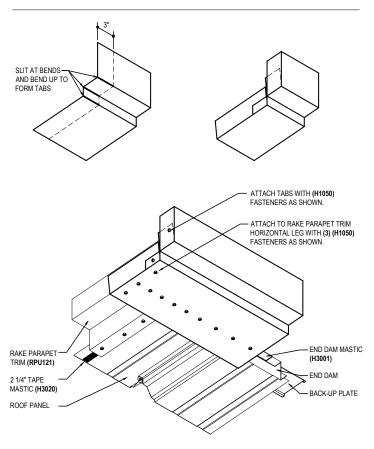

#### HE PARAPET TO RAKE PARAPET TERMINATION

DETAIL SHOWN WITH ROOF AND WALL PANEL. SEE WALL SHEETING ERECTION NOTES FOR WALL PANEL FASTENER LOCATIONS

El7681

**Detailer Notes:** 

1) N/A

Issued: 10.14.22 (2020-039) CERTIFIED ERECTION DETAILS Detail Size (W x H): 1 x 2

Issued By: SLF